

Trench MOS Barrier Schottky Rectifier



DO-15
(DO-204AC)

Cathode  Anode

Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)



Parameter		Symbol	Limit		Unit
Maximum repetitive peak reverse voltage		V _{RRM}	100		V
Maximum average forward rectified current		I _{F(AV)}	3		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode		I _{FSM}	50		A
Operating junction and storage temperature range		T _J , T _{STG}	-65 to +150		°C
Typical thermal resistance per diode (Mounted on FR-4 PCB)		R _{θJA}	22		°C/W
Instantaneous forward voltage	I _F =3A	T _J =25°C	TYP.	MAX.	V
			0.75	0.80	
	I _F =3A	T _J =125°C	0.71	-	
Instantaneous reverse current per diode at rated reverse voltage	T _J =25°C		10	-	uA
	T _J =125°C		10	-	mA

Notes:


(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


RATINGS AND CHARACTERISTICS CURVES

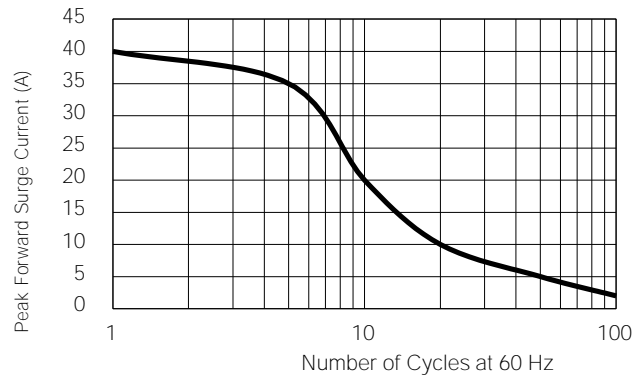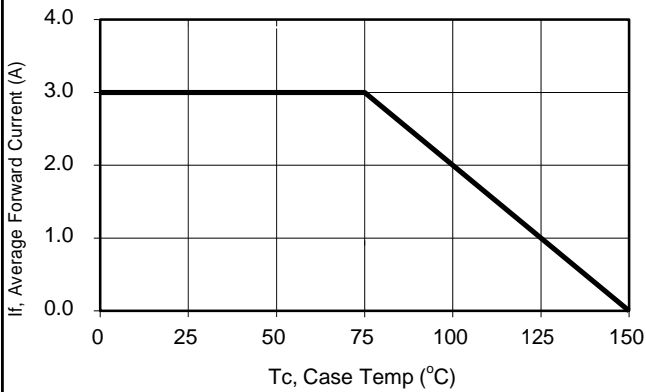


Current Derating, Case

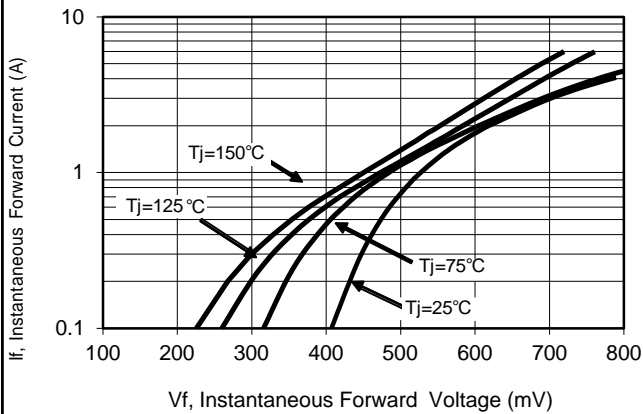

Maximum Repetitive Surge Current

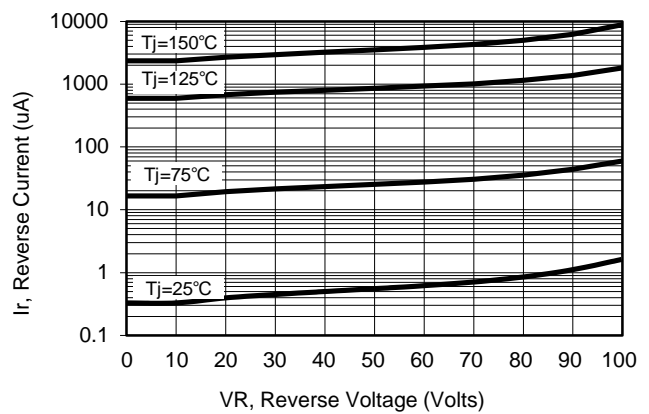

Typical Forward Voltage

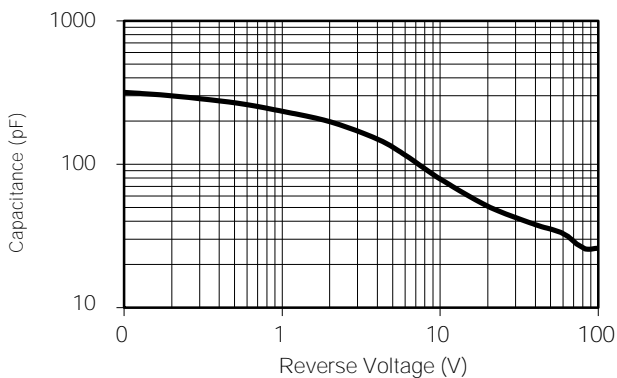

Typical Reverse Current

Typical Junction Capacitance

PACKAGE OUTLINE

DO-15 dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.05	6.75	0.238	0.266
B	2.95	3.53	0.116	0.139
C	24.01	29.9	0.945	1.181
D	0.71	0.88	0.028	0.035