


## Special For DC-AC Rectifier Bridge

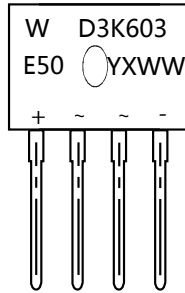

### PINNING

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

### Features

- Compliant with RoHS Provisions
- Low forward voltage, high forward current
- High forward surge current capability
- High heat-conducting performance
- Thermal welding performance: 260 °C/10sec

### Applications

- Switching Power Supply
- Home Appliances, Office Devices
- Industrial Auto-equipments

### Maximum Ratings and Electrical characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbol	D3K603E50	D3K606E50	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	300	600	V
Maximum RMS voltage	$V_{RMS}$	210	420	V
Maximum DC Blocking Voltage	$V_{DC}$	300	600	V
Average Rectified Output Current	$I_o$	6		A
Reverse Recovery Time. $I_F=0.5A, I_R=1A, I_{RR}=0.25A$	$T_{rr}$	75		ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load(JEDEC Method)	$I_{FSM}$	150		A
$I^2 t$ rating for fusing ( 1ms < t < 8.3ms)	$I^2 t$	93.3		A <sup>2</sup> S
Dielectric Strength: Terminals to Case, AC 1 minute	$V_{dis}$	2.5		KV
Mounting torque	TOR	Recommended torque:0.5		N.m
Maximum Forward Voltage at 3.0 A	$V_F$	1.15	1.35	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	10 500		$\mu A$
Junction to ambient , without heatsink @ $T_A=25\text{ }^\circ C$ Junction to case, with heatsink @ $T_A=125\text{ }^\circ C$	$R_{\theta JA}$ $R_{\theta JC}$	22 3		$^\circ C/W$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150		$^\circ C$


Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.


## RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

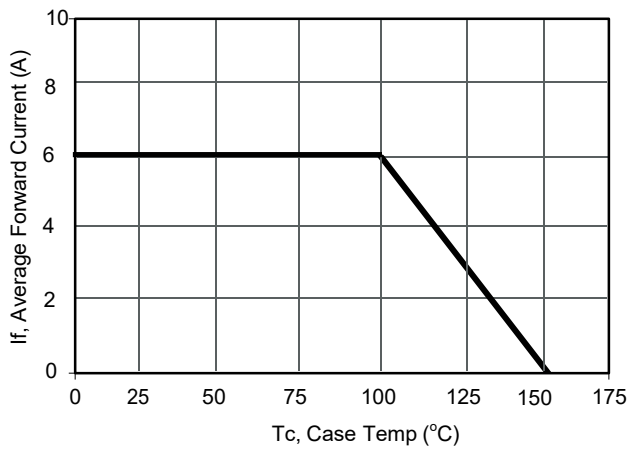


Current Derating, Case

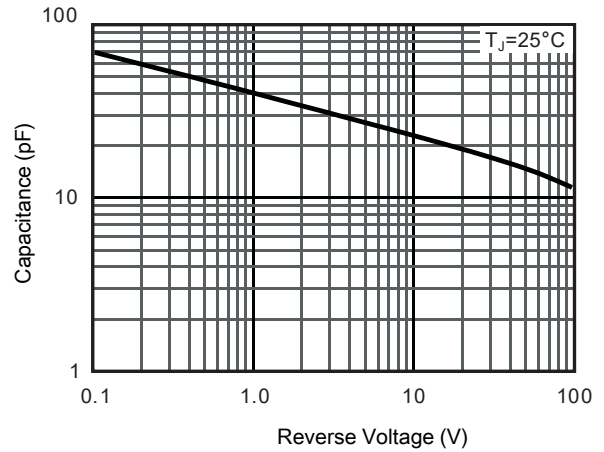

Typical Junction Capacitance

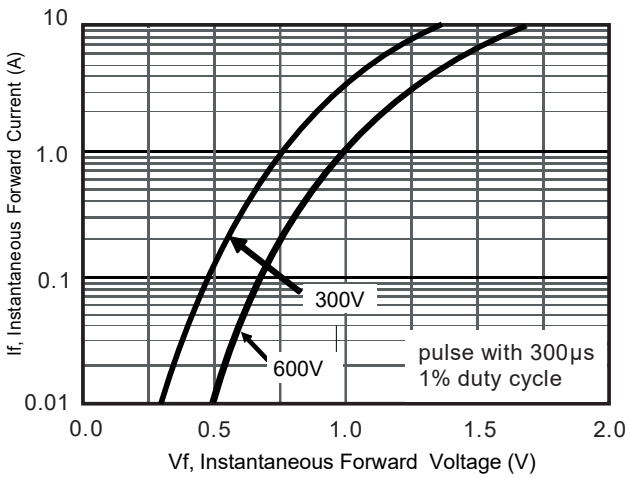

Typical Forward Voltage

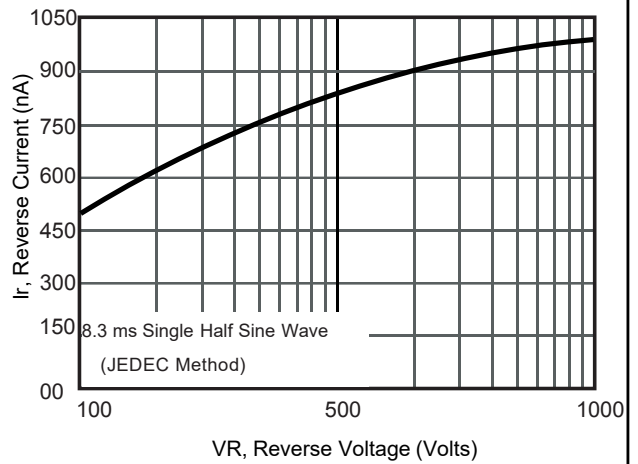

Typical Reverse Current

## PACKAGE OUTLINE DIMENSIONS

D3K

